



ISO 9001-2008
ATR 0401



meisa®

AM605 NO-ASBESTO

COMPOSICION

El estilo AM605 es un laminado de color verde, fabricado a partir de una fibra sintética Aramídica, ligada con un compuesto a base de caucho SBR/NBR de alta calidad e inserción de malla metálica en acero al carbón o inoxidable. Para utilizarse en la mayoría de los procesos en la industria petrolera, petroquímica y la industria en general.

Es adaptable y vigorosa, ayuda a efectuar un sellado fuerte contra presiones bajas, medianas o altas entre bridas ásperas.

Dimensiones: 40X40, 50X50, 60X62, 75X75, 60X120, 75X150, 120X120, 150X150 pulgadas.


Espesores : 1/32, 3/64, 1/16, 3/32, 1/8, 3/16, ¼ pulgadas y especiales.

Cumple con la norma ASTM F104

PARAMETROS

AM 605

Presión Max= 180 kg/cm² Tmax= 400°C

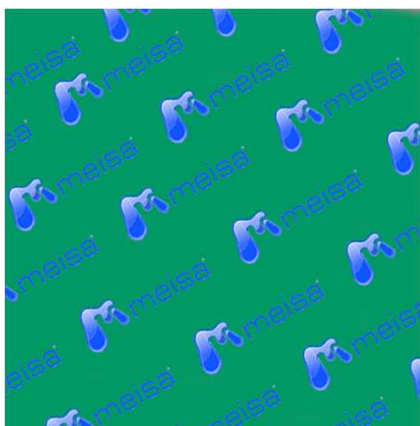

Manufacturera e Insumos, S.A. de C.V.
Camino viejo a la estación de FFCC No. 102.
Predio San Ignacio.
C.P. 38480.
Cortazar, Gto. México.
Tel. +52 (01411) 1553531.

LOS DATOS OBTENIDOS EN ESTA HOJA TECNICA SIRVEN COMO GUIA PARA LA ELECCION DE LA LAMINA ADECUADA A LAS DIFERENTES CONDICIONES DE OPERACIÓN, INSTALACION Y USO, DE LOS CUALES NO TENEMOS INFLUENCIA POR LO TANTO LA GARANTIA SE LIMITA A LA CALIDAD DE LOS MATERIALES.





ISO 9001-2008
ATR 0401



meisa®

AM605 NO-ASBESTOS (SYNTHETIC FIBERS)

COMPOSITION

The style AM605 green in color, this manufactured with synthetic fibers aramid, bonded rubber SBR-NBR is used in the oil industry, petrochemical industry and process in general.

Is a sheet of green, produced from asynthetic fibers aramid league with a compound basa rubber SBR-NBR high quality. You get a sheet for seals with exceptional flexibility and conduct to the court, which add to its characteristics swelling in control oil, its very appropriate for material industry in general.

Dimensions : 40X40, 50X50, 60X62, 75X75, 60X120, 75X150, 120X120, 150X150 inches.


Thickness : 1/32, 3/64, 1/16, 3/32, 1/8, 3/16, ¼ inches and specials.

Compliant ASTM -F-104

PARAMETERS

AM 605

Presión Max= 180 kg/cm² Tmax= 400°C

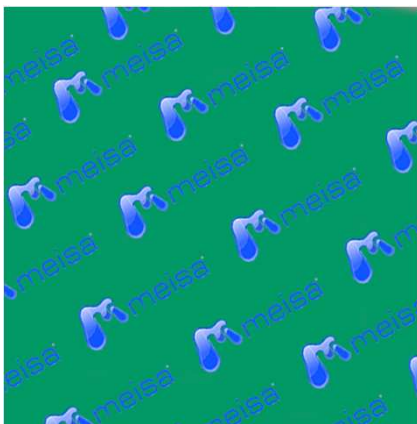

Manufacturera e Insumos, S.A. de C.V.
Camino viejo a la estación de FFCC No. 102.
Predio San Ignacio.
C.P. 38480.
Cortazar, Gto. México.
Tel. +52 (01411) 1553531.

THE DATA GIVEN ON THIS TECHNICAL SHEET SHOULD NOT BE USED AS APPLICATIONS LIMITS, BUT AS GUIDANCE FOR AN APPROPRIATE CHOICE. WE CAN OFFER GUARANTEES ONLY FOR THE QUALITY OF OUR PRODUCTS.

